

## SPECIFICATIONS

**Cylinder** Extruded aluminum 6063-T5, .110" thick, seamless design. See finish note.

**Trim Frame** Die cast aluminum locks up to cylinder with (4) flat head machine screws. Two 1 inch vented plugs dissipate heat insures maximum lamp life. Finished to match cylinder. See finish note.

**Reflector** Spun aluminum alloy 3002, electro-chemically processed to provide specular finish.

**Baffle** 8" diameter spun aluminum grooved baffle. Finished matte black.

**Ballast** Electronic ballast, input voltage 108-305V, 50/60 HzUL Listed, Type 1, thermally protected, FCC 47CFR Part 18 Non-Consumer, Sound Rated A, ANSI C62.41 Cat. A transient protection.

**Lamp** 70 watt PAR, phosphor coated medium base (by others).

**Lamp Holder** High heat porcelain, 4 KV rated with nickel plated copper screw shell, spring loaded center contact, lamp grips, SF-2 leads (200° C). Impregnated gasket.

**Trunnion Mounting System** 14 ga. cold rolled steel. Trunnion locks in place with two dished toothed periphery lock washers and polypropylene five arm knobs. Finished same as housing. See finish note.


**Finish** Detergent cleaned with iron phosphate and chromic acid rust inhibitor. Chip resistant powder urethane polyester coating, electrostatic applied and baked. Standard colors are textured bronze and white. Custom colors are available. Consult factory or sales representative.

**Labels** Trunnion mount suitable for damp location under covered ceiling. ETL, CETL and I.B.E.W. assembled and labeled.

**Fixture Warranty** The mechanics are guaranteed to be free from defective material and workmanship, under normal installation and operating conditions, for ten years from date of shipment from the factory. See general terms and conditions.


**Photometric Information** Contact factory.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

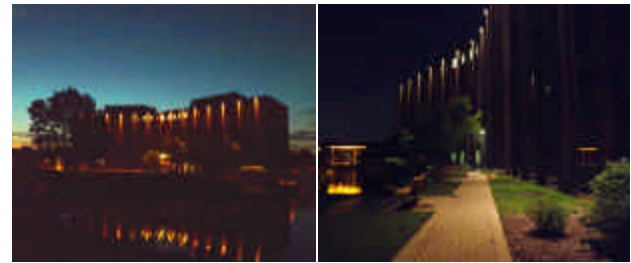

Installation with PAR30LN

## Dimensions

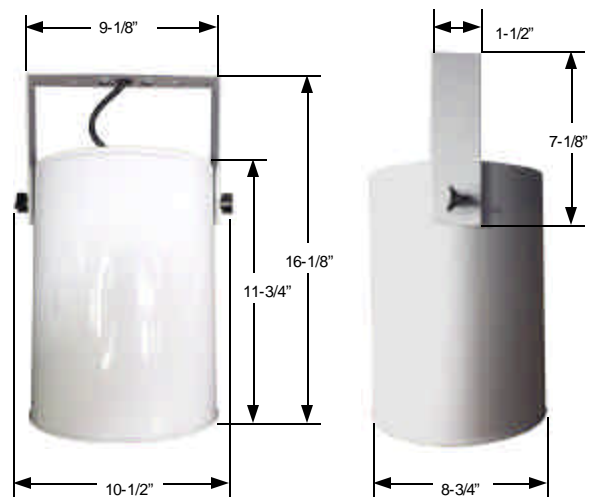

**WBE City of Chicago Certified**

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505  
Phone: 773-427-7000 Fax: 800-217-1260 [www.escolighting.com](http://www.escolighting.com)  
Established 1975







## HOW TO ORDER



Catalog Number	Mounting System	Maximum Lamp Wattage
<b>TX61238</b>	Trunnion Mount	70 watt maximum lamp

## OPTIONS AND ACCESSORIES

	<b>Photo Control*</b> Suffix Catalog number with 120 Volt = <b>PC4</b> 208-277 Volt = <b>PC5</b> <b>Example: TX61238</b> becomes : <b>TX61238PC4</b>
	<b>Fuse and Fuse Holder*</b> Suffix Catalog Number With <b>F</b> <b>Example: TX61238</b> becomes <b>TX61238F</b>

\*120 or 277 volt must be specified when ordering a Photo Control or Fuse and Fuse Holder.

**Voltage Suffix** 120v = -1, 277v = -4

**Finish Color Options** Textured Bronze=**BZ**, White=**W**

**EXAMPLE ORDER NUMBER:** TX61238FBL-1 = Trunnion mount, 70 watt, 5000k, fuse and fuse holder, textured black, 120 volt.



**WBE City of Chicago Certified**

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505  
 Phone: 773-427-7000 Fax: 800-217-1260 [www.escolighting.com](http://www.escolighting.com)  
**Established 1975**

